

→ record system 20

Variants, options and accessories available for your automatic sliding door



→ Product range of automatic doors

standard sliding doors
1- or 2-leaves
telescopic
curved



angular
folding
specific sliding door
solutions



→ Operator casings

operator height
108 and 150 mm
(also hinged, removable)



→ Special options

optical Lock-display (OVA)
user dependable opening width (TOWA)
bell contact
locking monitoring

→ Actuation and Safety sensors

RAD 290 (Radar-motion detector)
RIC 290 (combined sensor)
AIR 290 (Infrared motion detector)



Hygienic sensor
Pushbutton, control unit
Wireless-actuation EASY open, EASY entry
Active and passive infrared sensors
Wireless-remote control for RADAR



→ SCAPECORD door systems

for escape routes
redundant RED
mechanical energy CO48
Breakout-system TOS



→ Door leaf weights max.

standard sliding doors 2 x 120 kg
1-leaf 1 x 150 kg
DUO Version 2 x 150 kg
Telescopic door 4 x 80 kg

→ Installation variations

intel installation, self-supporting
or ceiling

→ Profile systems for door leaves and side screens

aluminium 20 for 10 mm monoglass
aluminium 32 for 24 mm insulated glass
third-party profiles up to 65 mm



→ Protective screen

elegant, transparent
and inconspicuous




→ Surface treatment

colour treated (RAL)
anodized




→ Burglar resistant-options

SAFECORD burglar proof sliding door (certified WK 2)
MPV multipoint locking device
floor channel (stainless steel)
safety channel



→ Fire- and smoke protection systems

sliding door systems FEUCORD,
RS, T30 (according to relative
country guidelines)

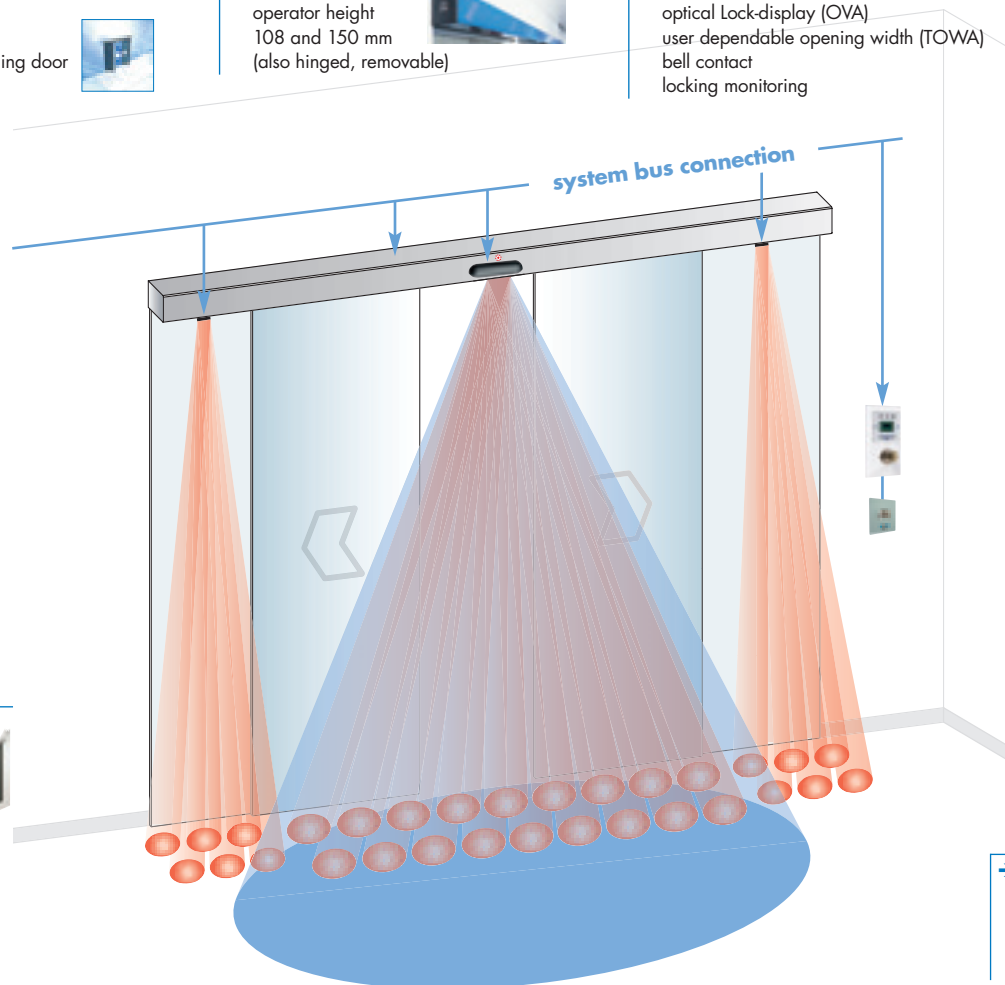

→ Key-operated contact

SSK attached or remote-controlled



→ Manual unlocking devices

HEI inside, HEA outside (manual)

→ Storage battery for emergency operation

NiCd or lead storage battery



→ Locking devices

automatic or manual
bolt locking (VRR 20)
MPV Multipoint locking




→ Control panels

BDE-D (with display)
BDE-M (mechanical key-operated switch)



→ Central door management

record ADM^{pro}
record ADM^{open}
LON interface
Web Camera



www.agta-record.com



your global partner for entrance solutions

